


Shahi Engineering Works 19/1 R.N Tagore Road, Kolkata - 700 076

Phone: +9230027567/9333133392 Email: shahiengineeringworks@gmail.com

GUIDE RAIL



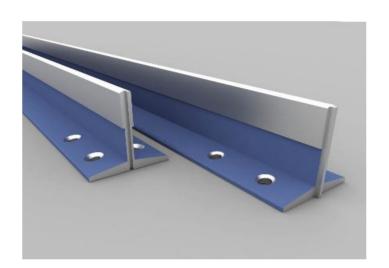

GUIDE RAILS BRACKETS

Salient features:

- Effortless installation
- Robustly constructed
- Precise finishing
- Great durability
- Lasted functionality
- Superior quality
- Inexpensive maintenance
- Perfect strength
- Rust proof

Utilization:

- Guide Rails, the Steel Tracks of "T" form, which creates the section with guiding surfaces for directing the course of travel of an elevator. It is generally affixed to the both sides of the hoist way
- These are of excellent features that include higher longevity, immense tensile strength, and affordable maintenance. The rails, that we offer, are in various forms, dimensions and sizes. There are more other positive conditions for which our clients get benefited.
- The counterweight can balance properly on the buffer support if the spring buffer gets properly affixed.
- Automatic or mechanized compensation can be done through the proper fixing of the guides to the brackets and building also.

Technical Specification

| GUIDERAIL | b1 | hı | h | k | n | c | g | f | m1 | m2 | t1 | t2 | d | d1 | 1 | b 3 | l2 | l3 |
|--------------------|------------|-------------|-------|--------------|------|-----|-------------|------|---------------|---------------|------|------|----|----|------|------------|-------|------|
| | +/- 0.5 | +/- 0.75 | +/- | +/- 0.1/0 | +3/o | | +/- 0.75 | | +/- 0.06/0 | +/- 0.06/0 | | | | | +3/o | +/- | +/- | +/- |
| Т70/В | 70 | 65 | 64 | 9 | 34 | 6 | 6 | 8 | 3 | 2.95 | 3.5 | 3 | 13 | 26 | 128 | 42 | 105 | 25 |
| T ₇₅ /B | 75 | 62 | 61 | 10 | 30 | 8 | 7 | 9 | 3 | 2.95 | 3.5 | 3 | 13 | 26 | 123 | 43 | 90 | 30 |
| T78/B | 78 | 56 | 55 | 10 | 26 | 7 | 6 | 8.5 | 3 | 2.95 | 3.5 | 3 | 13 | 26 | 138 | 42 | 105 | 25 |
| T82/B | 82 | 68.3 | 66.6 | 9 | 25.4 | 7.5 | 6 | 8.25 | 3 | 2.95 | 3.5 | 3 | 13 | 26 | 111 | 50.8 | 81 | 27 |
| T89/B | 89 | 62 | 61 | 15.88 | 33.4 | 10 | 7.9 | 11.1 | 6.4 | 6.37 | 7.14 | 6.35 | 13 | 26 | 156 | 57.2 | 114.3 | 38.1 |
| T127-1/B | 127 | 88.9 | 15.88 | 15.88 | 44.5 | 10 | 7.9 | 11.1 | 6.4 | 6.37 | 7.14 | 6.37 | 17 | 33 | 156 | 79.4 | 114.3 | 38.1 |

| GUIDERAIL | b1 | h1 | h | k | n | c | g | f | m1 | m2 | t1 | t2 | d | d1 | 1 | b 3 | l 2 | 13 |
|-----------|------------|---------------------|------------|--------------|------|---|-------------|---|---------------|---------------|--------------------|-------------|---|----|------|------------|------------|------------|
| | +/- 0.5 | +/- 0. 75 | +/- 0.1 | +/- 0.1/0 | +3/o | | +/- 0.75 | | +/- 0.06/0 | +/- 0.06/0 | +/- 0.10 | +/- 0.10 | | | +3/o | +/- 0.2 | +/- 0.2 | +/- 0.2 |
| T45/A | 45 | 45 | - | 5 | | - | - | - | 2 | 1.95 | 2.5 | 2 | 9 | - | - | 25 | 65 | 15 |
| T50/A | 50 | 50 | - | 5 | | - | - | - | 2 | 1.95 | 2.5 | 2 | 9 | - | - | 30 | 75 | 25 |